

PRODUCT SPECIFICATION

MODEL : OP-238

CUSTOMER :

CHECKED					APPROVED

SUPPLIER : TAIYI Technology Co.,Ltd

DESIGN	CHECKED				APPROVED



TAIYI Technology Co., Ltd.

Manufacturing
Plant A, First Floor, No.33, Yingshan Road, Luo Cun Development
Zone, Lilin Town, Zhong Kai Gao Xin Qu
Huizhou Guangdong China

REVISION HISTORY

<i>Version</i>	<i>Date</i>	<i>Change Description</i>

이문서는(주)태익테크놀로지의소유물로서저작권법에따라보호받고있다.



따라서 (주)태익테크놀로지의허가없이는무단전제나

복사, 그리고사외로배포할수없다.

This document is confidential to TAIYI Technology Co., Ltd.

The Information contained herein is not to be distributed, revealed or disseminated
within or outside the company to any other party other than TAIYI without the
prior expressed consent and written permission of TAIYI.

OP-238

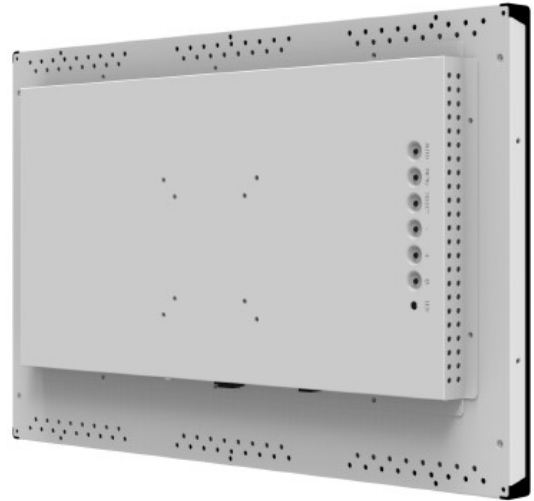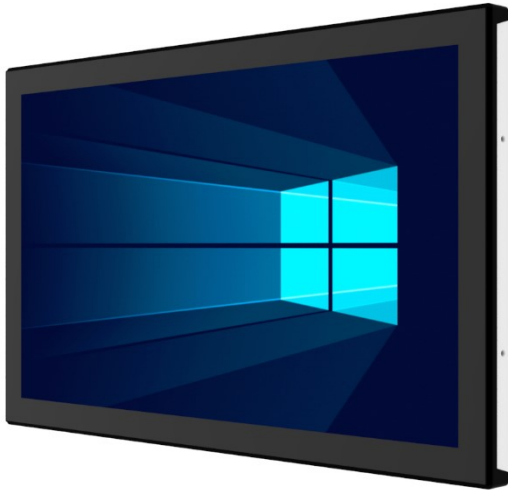

○ 23.8 Inch TFT LCD Monitor.

- ⇒ Input HDMI, Analog RGB
- ⇒ Resolution : 1920 X 1080 (FHD)
- ⇒ Touch : Projective Capacitive type

Specifications

Items		OP-238
Panel	Display Type	a-Si TFT active matrix
	Max. Resolution	1920 x 1080
	Active Display Size	527.04(H) x 296.46(V)
	Display Colors	16.7M
	Brightness	250 cd/m ² (Typ.)
	Contrast Ratio	3000 :1 (Typ.)
	Viewing Angle	85°/ 85°/ 80°/ 80°(L/R/U/D)
	Response Time	16 mS (Rising + Falling)
	Pixel Pitch	0.276 * 0.276
	Refresh Rate	60Hz
Terminal	HDMI Input	Yes (1port)
	RGB Input	Yes (D-Sub15-pin 1 port)
	Audio Input	Option (3.5mm Stereo jack 1 port)
	Internal Speaker	Option (3W * 1)
	Power Input	12V_DC (Outside Ø5.5, Inside Ø2.5)
Convenience	Remote controller	No
	OSD Key	Yes
	Power Savings(DPMS)	Yes
General	Power Supply	DC 12V
	Power Consumption	26 Watts
	ST-BY Power Consumption	0.5 Watts Under
	Dimension set (WxDxH)	579.8 * 349.3 * 42.7
	Wall Mount Bracket	75 * 75, 100 * 100
	Weight w/o Packaging	7.1 Kg
	Weight w Packaging	Kg TBD

Specifications

Items		OP-215
Touch Screen (Option)	Touch Method	ITO Projective Capacitive type
	Max. number of touch	10 point
	Glass	3mm Tempered Glass
	Touch method	Finger, gloved hand or any other pointer.
	Touch response time	16ms
	Calibration	Requires no software
	Interface	USB 2.0 (full speed), HID compliant, plug-and-play compatible
	Operating systems	Windows / Android / Linux / MAC

Environment

Items		OP-215
	Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
	Operating Humidity	20% ~ 90%, non-condensing
	Storage Temperature	-13°F ~ 149°F (-25°C ~ 65°C)
	Storage Humidity	5% ~ 90%, non-condensing

Accessories

Product	Description
Remote control & Battery (AAA*2)	No
Power Cord	Yes
AC-DC Adaptor	12V / 4A (Outside Ø5.5, Inside Ø2.5)
D_Sub Cable	15Pin
Touch Cable	Yes

Dimension

